

# KBZ®

www.folangsiforklift.com

## ELECTRIC PALLET TRUCK 电动托盘搬运车

KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ

### CBD20-XD

AC 2000Kg

- ▶ Mechanical Steering—Economic, comfortable, more reliable.
- ▶ AC Driving System—Low noise, quiet, without carbon brush and free maintenance.
- ▶ Electric Lifting—Rapid, efficient, electricity limit switch is STD.
- ▶ Excellent Design—Easily in and out of the double tray.
- ▶ Energy conservation—Save energy, more environmentally friendly.
- ▶ AC Controller—Stepless, strong power, multiple automatic protection.

- ▶ 机械转向—舒适、经济、更可靠
- ▶ 交流驱动—低噪、静音、无碳刷、免维护；
- ▶ 电起升—快速、高效，标配起升限位装置；
- ▶ 卓越设计—货叉轻松进出双面托盘；
- ▶ 节能—低能效，更环保；
- ▶ 交流控制器—无级调速、动力强劲、多重自动保护。



Electric Pallet Truck Expert

# KBZ®

www.folangsiforklift.com

## ELECTRIC PALLET TRUCK 电动托盘搬运车

KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ® KBZ®


### SPECIFICATION

详细说明

	Unit		
<b>Feature 特性</b>	Model 型号	CBD20-XD	
	Configuration No. 配置号	410	
	Load capacity 额定载重	kg	2000
	Load center 载荷中心距	mm	600
	Wheel basenter 轴距	mm	1407
<b>Wheels 车轮</b>	Operating type 操作类型	Walkie/Stand On	
	Wheels type 车轮类型(前/后)	PU	
	Wheel quantity Driving wheel/Balance wheel/Bearing wheel 驱动轮/平衡轮/承重轮数量		1/1/4
	Driving wheel size 驱动轮尺寸	mm	φ 248 × 75
	Bearing wheel size 承重轮尺寸	mm	φ 84/80 (Double Pulley)
<b>Demension 尺寸</b>	Balance wheel size 平衡轮尺寸	mm	φ 140/60
	Lowered fork height 货叉最低离地高度	mm	85
	Max. lifting height 货叉最大起升高度	mm	210
	Max. lifting Route 最大起升行程	mm	125
	Outside width between forks 货叉外侧间隙	mm	500/600/650/685
	Inside width between forks 货叉内侧间隙	mm	220/270/320/355
	Fork Length 货叉长度	mm	1150/1200
	Fork width 货叉宽度	mm	165
	Fork thickness 货叉厚度	mm	55
	Overall length 整车全长	mm	1874/2247
	Overall width 车体宽度	mm	725
	Overall height(with handle) 整车高度(含手柄)	mm	1475
<b>Performance 性能</b>	Overall height(without handle) 整车高度(不含手柄)	mm	940
	Min.Turning radius 最小转弯半径 踏板收起/放下	mm	1680/2060
	Min.Aisle width for pallets 800 × 1200 最小直角堆垛通道宽度	mm	2000/2320
	Min.Aisle width for pallets 1000 × 1200 最小直角堆垛通道宽度	mm	2030/2340
	Travel speed,laden/unladen 最大行驶速度 满载/空载	km/h	6/6
<b>Electrical configuration 电气配置</b>	Lift speed,laden/unladen 最大起升速度 满载/空载	mm/s	20/25
	Travel speed,laden/unladen 最大下降速度 满载/空载	mm/s	40/30
	Gradeability,laden/unladen 爬坡度 满载/空载	%	5/7
	Drive motor 驱动电机	KW	AC 1.5
	Lift motor 起升电机	KW	DC 1.2
<b>Weight 重量</b>	Steering motor 转向电机	KW	/
	Battery voltage/capacity 蓄电池电压/容量	V/Ah	24/210
	Brake 制动		Electromagnetic/Regenerative
	Controller 控制器型号		CURTIS
	Battery weight 蓄电池重量	kg	190
	Service weight with battery 自重(包含蓄电池)	kg	710

### DIMENSION DRAWING

外形尺寸图

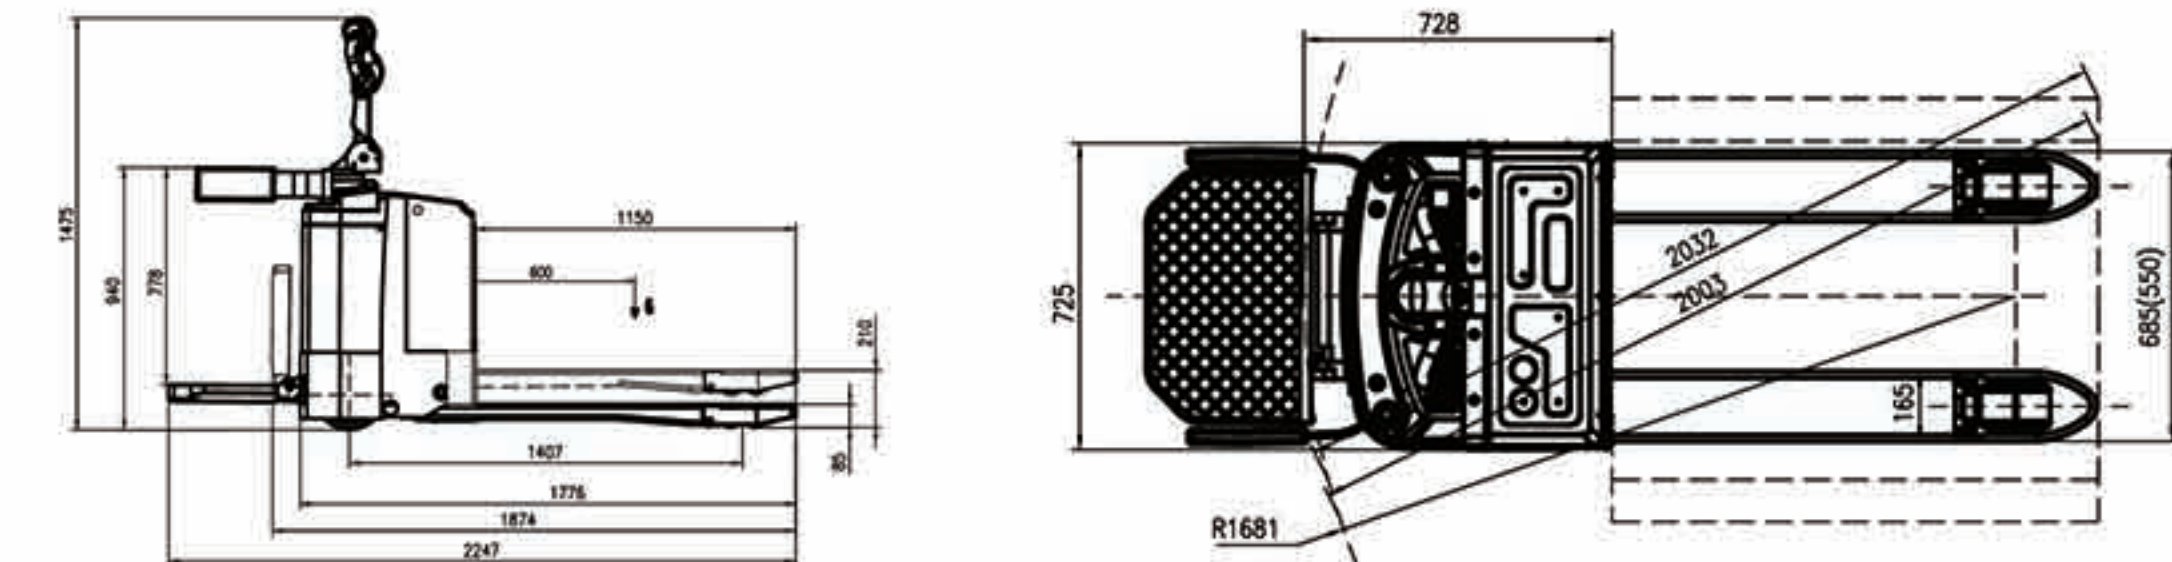

FOLANGSI MACHINE CO., LTD.

Tel.:020-39993595 Fax:020-39993597

E-mail:admin@folangsiforklift.com

# KBZ®