

# KBZ<sup>®</sup>

www.folangsiforklift.com

## ELECTRIC STACKER 电动托盘堆垛车

KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ

### CDD10-LP 窄腿 DC 1000Kg

#### CONFIGURATION AND PERFORMANCE

- ▶ Separately excited motor, Strong climbing ability.
- ▶ High strength forks.
- ▶ Built-in charger is standard.
- ▶ Automatic lifting limit, proximity switch, long life.

#### SAFETY

- ▶ Stepless speed control system, safe and quiet.
- ▶ Controller with Multiple automatic protection.
- ▶ Emergency reversing device/Emergency brake switch.

#### 配置和性能

- ▶ 他励驱动电机, 爬坡力强;
- ▶ 高强度货叉
- ▶ 标配内置充电机;
- ▶ 起升自动限位, 长寿命接近开关。

#### 安全

- ▶ 驱动无级调速, 安全、静音;
- ▶ 控制器多重自动保护系统;
- ▶ 紧急反向装置 / 紧急制动开关。



Electric Pallet Truck Expert

# KBZ<sup>®</sup>

www.folangsiforklift.com

## ELECTRIC STACKER 电动托盘堆垛车


KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ

### SPECIFICATION


详细说明

	Unit	
Model 型号		CDD10-LP
Configuration No. 配置号		070
Type 类型		Narrow legs
Mast type 门架类型		2-stage STD
Load capacity 额定载重	kg	1000
Load center 载荷中心距	mm	600
Wheel base 轴距	mm	1150
Operating type 操作类型		Walkie
Wheels type 车轮类型(前/后)		PU
Wheel quantity Driving wheel/Balance wheel/Bearing wheel 驱动轮/平衡轮/承重轮数量		1/1/4
Standard lift height 标准门架起升高度	mm	2000/2500/3000/3300
Max extend height 门架作业时整车最大高度	mm	2385/2885/3385/3685
Mast lowered height 门架缩回时整车静态高度	mm	1550/1800/2050/2200
Lowered fork height 货叉最低高度	mm	90
Fork size (Length/width/thickness) 标准货叉规格 (长/宽/厚)	mm	1150(1220)/185/55
Overall length 整车全长 踏板收起/放下	mm	1733
Overall width 车体宽度	mm	790
Outside width between forks 货叉外侧间隙	mm	550/600/650/685
Inside width between forks 货叉内侧间隙	mm	180/230/280/315
Min. Turning radius 最小转弯半径 踏板收起/放下	mm	1350
Min. Aisle width for pallets 800 x 1200 最小直角堆垛通道宽度	mm	1914
Min. Aisle width for pallets 1000 x 1200 最小直角堆垛通道宽度	mm	1955
Min. ground clearance 最小离地间隙	mm	30
Travel speed, laden/unladen 最大行驶速度 满载/空载	km/h	3/3.5
Lift speed, laden/unladen 最大起升速度 满载/空载	mm/s	130/230
Travel speed, laden/unladen 最大下降速度 满载/空载	mm/s	130/230
Gradeability, laden/unladen 爬坡速度 满载/空载	%	5/7
Drive motor 驱动电机	KW	DC0.63
Lift motor 起升电机	KW	DC2.0
Battery voltage/capacity 蓄电池电压/容量	V/Ah	24/70
Brake 制动		Electromagnetic/Regenerative
Controller 控制器型号		HELI
Battery weight 蓄电池重量	kg	48
Service weight with battery 自重(包含蓄电池)	kg	580

### DIMENSION DRAWING 外形尺寸图

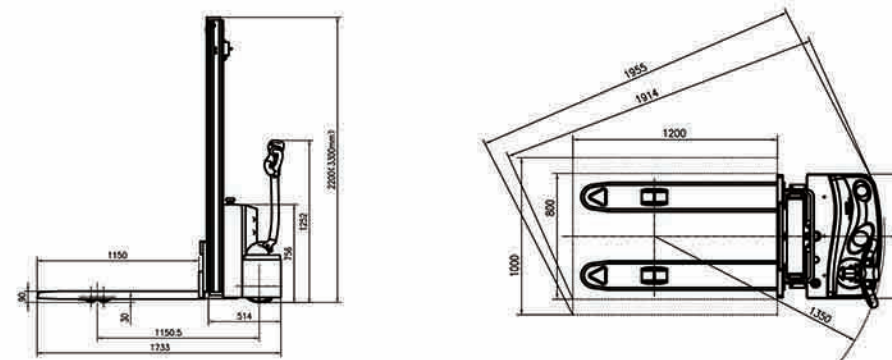

### 载荷曲线图 LOAD CURVE

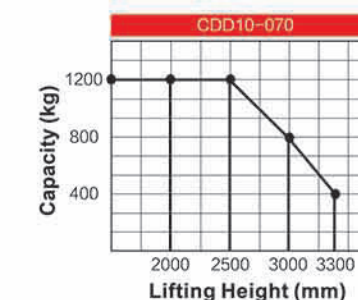

FOLANGSI MACHINE CO., LTD.

Tel.: 020-39993595 Fax: 020-39993597

E-mail: admin@folangsiforklift.com

# KBZ<sup>®</sup>