



www.folangsiforklift.com

ELECTRIC STACKER

电动托盘堆垛车

KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ

CDD16-LF/LH 三级全自由门架

AC 1600 Kg (起升高度: 3900-5800mm)

- ▶ 1.AC vertical driving motor reduces the failure rate and saves maintenance cost.
- ▶ 2.Electronic power steering system(EPS) for flexible and light turning improves the stability of electrical system.
- ▶ 3.Electronic reverse system guarantees operation safety,save the electric energy and protect hydraulic unit.
- ▶ 4.Pressurized vibration damping reduces the wheel skidding problems and increases operating comfort.
- ▶ 5.H steel mast used the cold drawing technology enhances machine structure and improves stability and security.

- ▶ 1. AC 电机,立式驱动,减少故障发生率,节约维护成本;
- ▶ 2. 电子助力转向 (EPS),转弯灵活、轻便,提高电气系统稳定性;
- ▶ 3. 电子限位系统,保障作业安全,节约电能,保护液压装置;
- ▶ 4. 增压减震,减少驱动轮打滑现象,增加操作舒适度;
- ▶ 5. H 钢门架“冷拉”工艺,强化车体结构,提高安全性和稳定性。



CDD16-LF/LH 三级全自由型门架(FULL FREE 3-STAGE MAST)

Mast model 门架型号	Max.lift height 最大起升高度(mm)	Load capacity 额定承载力(kg)	Mast lowered height 门架缩回时整车静态高度(mm)	Max.extend height 门架作业时整车最大高度(mm)	Free lift height 自由提升高度(mm)
ZSM390	3900	1050	1900	4400	1448
ZSM450	4500	700	2085	5000	1620
ZSM500	5000	500	2235	5500	1770
ZSM550	5500	350	2590	6000	2134
ZSM580	5800	300	2690	6300	2234



www.folangsiforklift.com

ELECTRIC STACKER

电动托盘堆垛车


KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ KBZ

SPECIFICATION

详细说明


	Unit	CDD16-LF	CDD16-LH
Feature 特性	Model 型号		CDD16-LF
	Configuration No. 配置号		950
	Type 类型		350
	Mast type 门架类型		Narrow legs
	Load capacity 额定载重	kg	1600
	Load center 载荷中心距	mm	600
Wheels	Wheel base 轴距	mm	1375
	Operating type 操作类型		Walkie/Stand On
Dimension 尺寸	Wheels type 车轮类型(前/后)		PU
	Wheel quantity 驱动轮/Balance wheel/Bearing wheel		1/2/4
	Standard lift height 标准门架起升高度	mm	4500
	Lowered fork height 货叉最低高度	mm	85
	WhFork size(Length/width/thickness) 标准货叉规格(长/宽/高)	mm	1150(1200)/185/55
	Overall length 整车全长 踏板收起/放下	mm	2015/2525
	Overall width 车体宽度	mm	957
	Outside width between forks 货叉外侧间隙	mm	550/600/650/685
	Inside width between forks 货叉内侧间隙	mm	180/230/280/315
	Min.Turning radius 最小转弯半径 踏板收起/放下	mm	1630/2040
Performance	Min.Aisle width for pallets 800 x 1200 最小直角堆垛通道宽度	mm	2230/2625
	Min.Aisle width for pallets 1000 x 1200 最小直角堆垛通道宽度	mm	2260/2650
	Min.ground clearance 最小离地间隙	mm	30
	Travel speed,laden/unladen 最大行驶速度 满载/空载	km/h	5/5
Electrical configuration	Lift speed,laden/unladen 最大起升速度 满载/空载	mm/s	130/230
	Travel speed,laden/unladen 最大下降速度 满载/空载	mm/s	130/230
	Gradeability,laden/unladen 爬坡速度 满载/空载	%	5/7
Weight	Drive motor/Lift motor/Steering motor 电动机/起升电机/转向电机 驱	KW	AC1.5/DC3/DC0.15
	Battery voltage 蓄电池电压	V	24
	Battery voltage/capacity 蓄电池电压/容量	Ah	280
	Brake 制动		Electromagnetic/Regenerative
Weight	Controller 控制器型号		CURTIS
	Battery weight 蓄电池重量	kg	235
Weight	Service weight with battery 自重(包含蓄电池)	kg	1578
		kg	1610

DIMENSION DRAWING 外形尺寸图

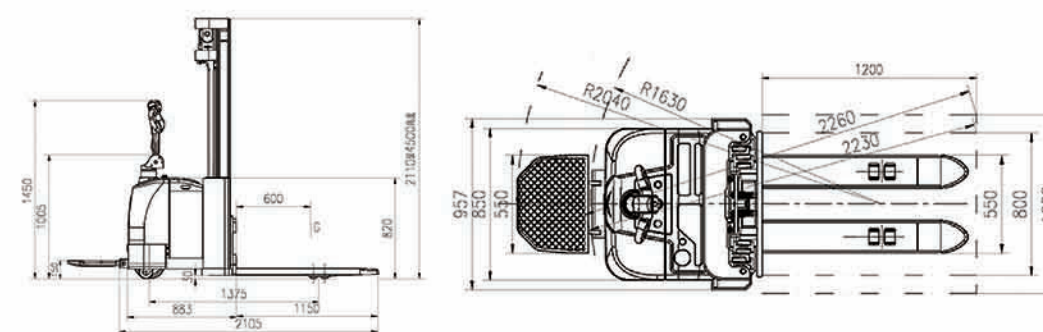

LOAD CURVE

载重曲线图



FOLANGSI MACHINE CO., LTD.

Tel.:020-39993595 Fax:020-39993597
E-mail:admin@folangsiforklift.com

